

LASVIT Technical Sheet


PRAHA COLLECTION

DESIGNER: Libeňský

YEAR OF DESIGN: 2016

Glass: Hand Blown Artistic Glass

Lasvit is proud to present lighting sculpture by Stanislav Libeňský – a set of original pendants designed for and installed in the Hotel Praha, a prominent architectural project completed during the 1980's. Although presenting the best of contemporary design, the hotel was later torn down on the premise of being “too large to operate.” Civic efforts to preserve it as a cultural monument failed and these lights are among the few remaining artifacts. Libeňský used varying thicknesses of glass to create a play of rays and shadows on the fixtures themselves as well as the surrounding interiors. Natural light creates a positive/negative image pattern directly on the glass. Amassing fixtures in a variety of shapes and heights enables diverse effects from a fireball look to more delicate forms resembling a kaleidoscope. These distinctive features, as well as variability of use, make the Praha lighting sculpture a timeless design.

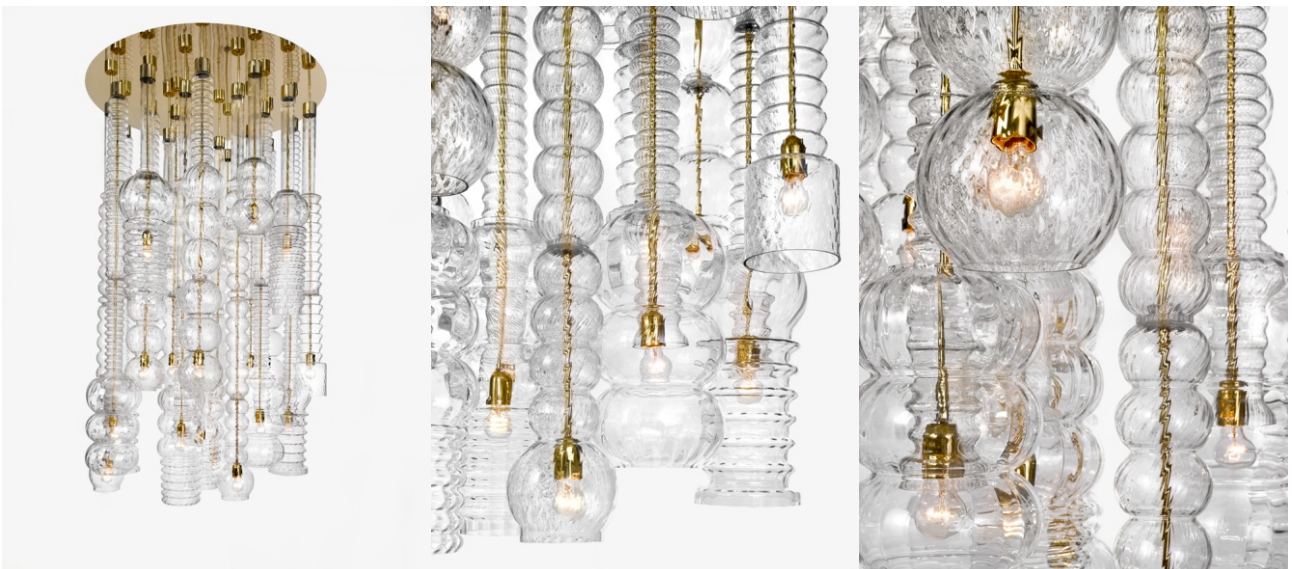

LASVIT Technical Sheet

PRAHA COLLECTION

TECHNICAL DETAILS PRAHA 1 SHORT

Type	CE	UL
Light source	1 × E27, 6W	1 × E26, 6W
Color temp.	2500K	2500K
	dimnable	dimnable
Input voltage	220-240V / 50/60Hz	120V / 60Hz
Rated power	6W	6W
Prot. rating	IP 20	
Safety class	CLASS I	
Dimming	trailing edge	
Surface Finish	titan gold, polished brass	

LASVIT Technical Sheet

PRAHA COLLECTION

TECHNICAL DETAILS PRAHA 1 LONG

Type	CE	UL
Light source	1 × E27, 6W	1 × E26, 6W
Color temp.	2500K	2500K
	dimnable	dimnable
Input voltage	220-240V / 50/60Hz	120V / 60Hz
Rated power	6W	6W
Prot. rating	IP 20	
Safety class	CLASS I	
Dimming	trailing edge	
Surface Finish	titan gold, polished brass	

LASVIT Technical Sheet

PRAHA COLLECTION

TECHNICAL DETAILS PRAHA 3 LONG, SHORT

Type	CE	UL
Light source	3 × E27, 6W	3 × E26, 6W
Color temp.	2500K	2500K
	dimnable	dimnable
Input voltage	220-240V / 50/60Hz	120V / 60Hz
Rated power	18W	18W
Prot. rating	IP 20	
Safety class	CLASS I	
Dimming	trailing edge	
Surface Finish	titan gold, polished brass	

LASVIT Technical Sheet

PRAHA COLLECTION

TECHNICAL DETAILS PRAHA 7

Type	CE	UL
Light source	7 × E27, 6W	7 × E26, 6W
Color temp.	2500K	2500K
	dimnable	dimnable
Input voltage	220-240V / 50/60Hz	120V / 60Hz
Rated power	42W	42W
Prot. rating	IP 20	
Safety class	CLASS I	
Dimming	trailing edge	
Surface Finish	titan gold, polished brass	

LASVIT Technical Sheet

PRAHA COLLECTION

TECHNICAL DETAILS PRAHA 22

Type	CE	UL
Light source	22 × E27, 6W	22 × E26, 6W
Color temp.	2500K	2500K
	dimnable	dimnable
Input voltage	220-240V / 50/60Hz	120V / 60Hz
Rated power	132W	132W
Prot. rating	IP 20	
Safety class	CLASS I	
Dimming	trailing edge	
Surface Finish	titan gold, polished brass	

LASVIT Technical Sheet


PRAHA COLLECTION

TECHNICAL DRAWING

Praha 1 short

Praha 1 long

Praha 3 long

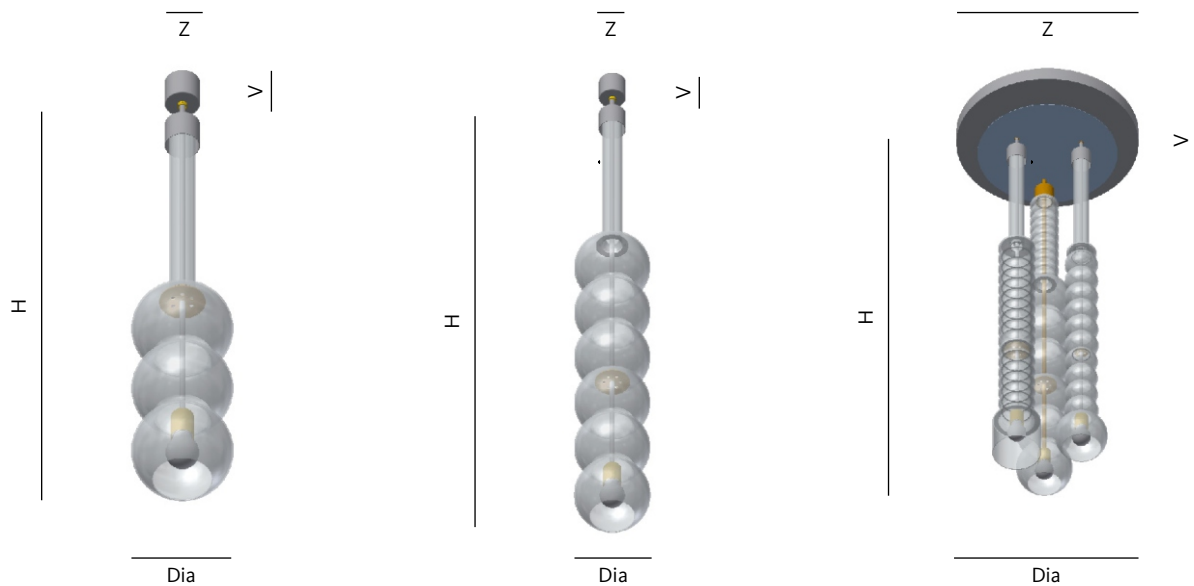

Name	Dia (mm/inch)	OH (mm/inch)	Z (mm/inch)	V (mm/inch)
Praha 1 short	250/9 ¹³ / ₁₆ "	1100/43 ⁵ / ₁₆ "	64/2 ¹ / ₂ "	57/2 ¹ / ₄ "
Praha 1 long	250/9 ¹³ / ₁₆ "	1491/58 ¹¹ / ₁₆ "	64/2 ¹ / ₂ "	57/2 ¹ / ₄ "
Praha 3 long	460/18 ¹ / ₈ "	1520/59 ¹³ / ₁₆ "	460 /18 ¹ / ₈ "	50/2 "
Praha 3 short	460/18 ¹ / ₈ "	1100/43 ¹ / ₃ "	460/18 ¹ / ₈ "	50/2 "


LASVIT Technical Sheet

PRAHA COLLECTION

TECHNICAL DRAWING

Praha 7

Praha 22

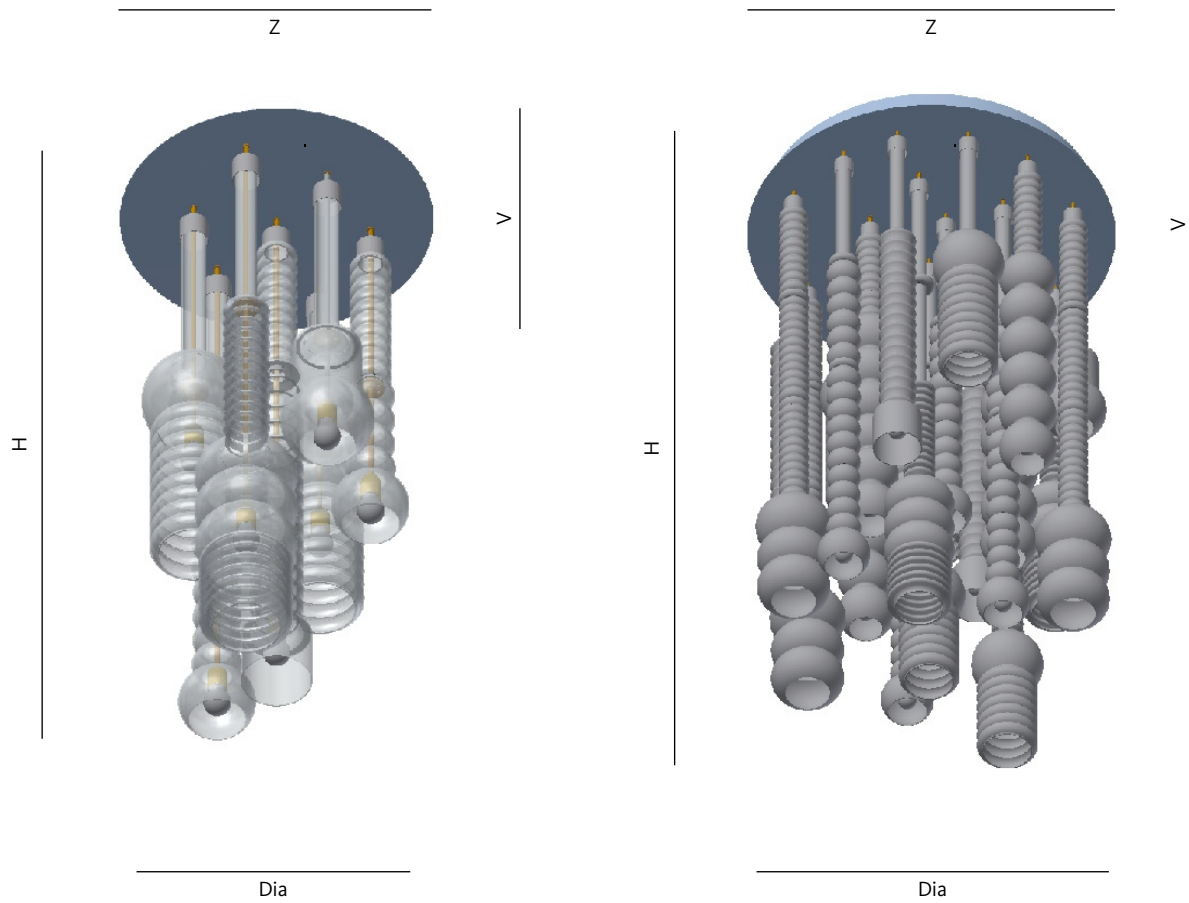

Name	Dia (mm/inch)	OH (mm/inch)	Z (mm/inch)	V (mm/inch)
Praha 7	700/27 ⁹ / ₁₆ "	1550/61"	700/27 ¹ / ₂ "	50/2"
Praha 22	1200/47 ¹ / ₄ "	2100/82 ¹ / ₁₆ "	1200/47 ¹ / ₄ "	100/3 ⁵ / ₁₆ "

LASVIT Technical Sheet

Name	Glass color	Item ID – CE	Item ID – UL	Weight (approx.)
Praha 1 short	clear	CLo26SB-2CEoo-0106S1	CLo26SB-2ULoo-0106S1	6kg/14lbs
Praha 1 long	clear	CLo26SA-2CEoo-0106S1	CLo26SA-2ULoo-0106S1	9kg/20lbs
Praha 3 long	clear	CLo26SC-2CEoo-0106S1	CLo26SC-2ULoo-0106S1	30kg/66lbs
Praha 3 short	clear	CLo26PF-2CEoo-0106S1	CLo26PF-2ULoo-0106S1	21kg/46lbs
Praha 7	clear	CLo26SD-2CEoo-0106S1	CLo26SD-2ULoo-0106S1	51kg/112lbs
Praha 22	clear	CLo26SE-2CEoo-0106S1	CLo26SE-2ULoo-0106S1	250kg/550lbs

EACH LASVIT COLLECTION IS UNIQUE BECAUSE IT IS COMPLETELY HANDCRAFTED. TINY BUBBLES AND OTHER IRREGULARITIES MAY OCCUR DUE TO THE NATURE OF THE HIGH QUALITY GLASS-BLOWING TECHNIQUE